

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 36 TOWNSHIP 16 RANGE 4

DATE: 10-27-02

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 5-9-00

IN. S.P.C. E ZONE NAD '83

NAME: 16043601

N: 504982.2811(m)

E: 67556.5047(m)

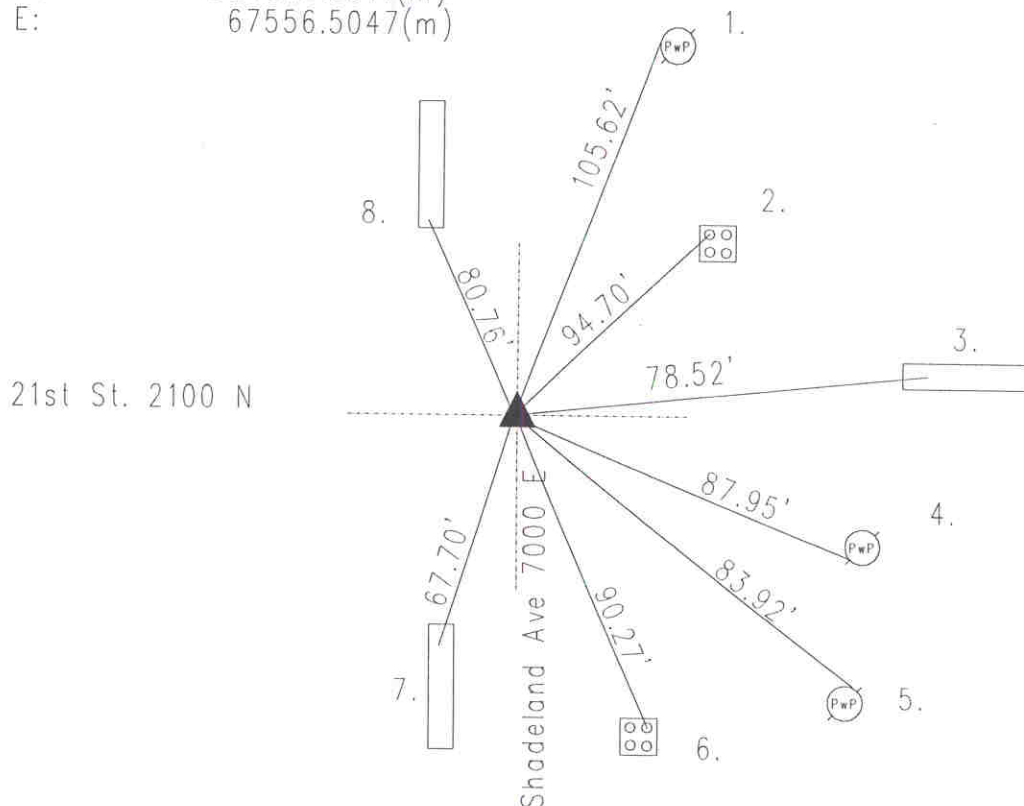

Original post set 1820 by Hendricks with witnesses: 36" beech N 41 E 34 links; 15" dogwood S 63 W 39 links per Marion County Atlas pg. 11. Hosbrook 5-14 thru 16-1882 called rock and both witnesses per Warren Township Legal Survey Book pg. 5. Schneider Engineering 5-31-74 surveyed; but did not call type of marker. Gries 1-22-87 called PK nail. Excavated by Wilcoxon 9-17-95 Harrison set per construction ties. Re-tied 5-9-00. Re-tied 10-27-02.

16043601

REF.	DISTANCE	DESCRIPTION
1.	105.62'	PK nail w/washer W PwP#1-478 A 8"up
2.	94.70'	Cut 'x' NW-bolt of aluminum pole base
3.	78.52'	Cut 'x' W-end of median
4.	87.95'	PK nail w/washer SW PwP no# 8"up
5.	83.92'	PK nail w/washer NE PwP no# 8"up
6.	90.27'	Cut 'x' NE-bolt of aluminum pole base
7.	67.70'	Cut 'x' N-end of median
8.	80.76'	Cut 'x' in S-end of median